



Outdoor Flood Light

SPECIFICATIONS

FAMILY RANGE

Code	Power	Dimensions	
FL-4874-07	7W	60*55*H208mm	
FL-4875-07	7W	80*62*H102mm	

PARAMETERS


Efficacy	100lm/W
CRI	>90
Adjustable	NO
Color Consistency	SDCM
Pf	0.9
Input Voltage	AC220-240V 50/60Hz
Operating Temp.	-20°C~60°C

APPLICATION

1. Stadiums
2. Parking Lots
3. Outdoor Arenas
4. Security Lighting
5. Architectural Lighting
6. Landscape Lighting
7. Industrial Facilities
8. Billboards
9. Warehouses
10. Construction Sites
11. Sports Fields
12. Facade Lighting
13. Parking Garages
14. Public Parks
15. Amusement Parks

DRAWING

Unit:mm

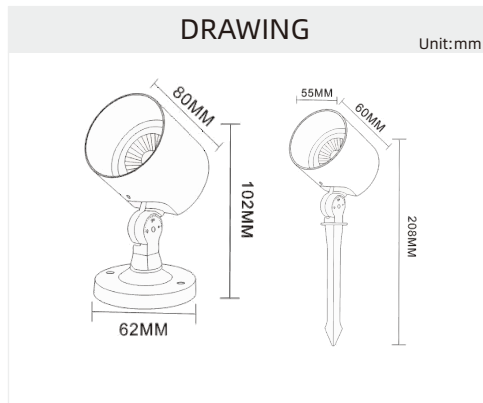

LED

COB

CCT



- 3000K
- 4000K
- 6000K

Finish




Material Description

Housing: Die-cast aluminum
AKESU powder Coating
Reflector: PMMA optical lens controlling flux with transparent tempered glass

Beam Angle



Photometric



For detailed technical project cut sheet can be requested by our online portal at www.priorled.com

