


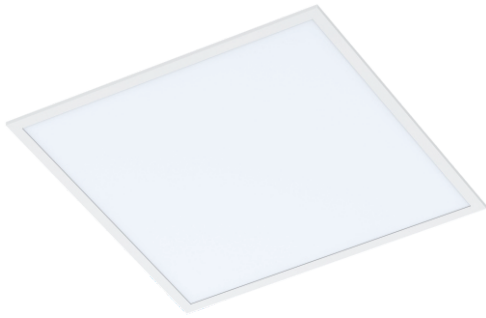

PRIOR

Ceiling-Light SERIES

SPECIFICATIONS

FAMILY RANGE

Code	Power	Dimensions	Cut-out 
M-PL-104936	36W	595*595*25H	570*570H
		620*620*25H	590*590H
		1195*295*25H	1170*270H
M-PL-104960	60W	1195*595*25H	1170*570H


PARAMETERS

Efficacy	110lm/W
CRI	>90
Adjustable	NO
Color Consistency	SDCM 2-3
Pf	0.9
Input Voltage	AC220-240V 50/60Hz
Operating Temp.	-20°C~60°C
UGR	<19

APPLICATION

- Modern Work spaces
- Institutions
- Retail Outlets
- Hotels
- High end Villa's

DRAWING Unit:mm



LED

SMD



CCT



Finish



Material Description

Housing: Die-cast aluminum
Diffuser: Optical PMMA Lens


Beam Angle



Dimming Options



Photometric



For detailed technical project cut sheet can be requested by our online portal at www.priorled.com

