



Outdoor Surface

SPECIFICATIONS

FAMILY RANGE

Code	Power	Dimensions	Cut-out
OS-2010-13	13W	Φ300*H91mm	-

PARAMETERS

Efficacy	100lm/W
CRI	>90
Adjustable	NO
Color Consistency	SDCM
Pf	0.9
Input Voltage	AC220-240V 50/60Hz
Operating Temp.	-20°C~60°C

LED

SMD

CCT



3000K
4000K
6000K

Finish



Material Description

Housing: ABS & Polycarbonate
with extra heat resistance


Diffuser: PMMA Polycarbonate Opal
semi transparent

Beam Angle



DRAWING

Unit:mm

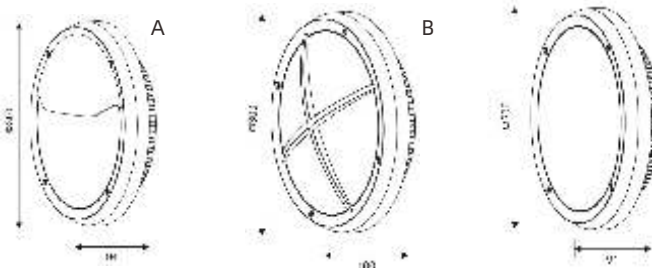


APPLICATION

Staircase
Garden General Area
Garden Wall Mounting
Services Area



Photometric



For detailed technical project cut sheet can be requested by
our online portal at www.priorled.com